

**(19) World Intellectual Property Organization
International Bureau**




(43) International Publication Date
11 December 2003 (11.12.2003)

(10) International Publication Number
WO 03/103093 A1

PCT

- | | |
|--|---|
| <p>(51) International Patent Classification⁷: H01R 4/24</p> <p>(21) International Application Number: PCT/US03/17045</p> <p>(22) International Filing Date: 30 May 2003 (30.05.2003)</p> <p>(25) Filing Language: English</p> <p>(26) Publication Language: English</p> <p>(30) Priority Data:
 2002-160194 31 May 2002 (31.05.2002) JP
 2003-040702 19 February 2003 (19.02.2003) JP</p> <p>(71) Applicant (for all designated States except US): MOLEX INCORPORATED [US/US]; 2222 Wellington Court, Lisle, IL 60532 (US).</p> <p>(72) Inventors; and</p> <p>(75) Inventors/Applicants (for US only): NAKANO, Tomohiro [JP/JP]; 5-11, Shonan-Nine #103, Shonan-dai</p> | <p>5-chome, Fujisawa-shi, Kanagawa, 252-0804 (JP). ODA, Toshiya [JP/JP]; 5-4 Apt.#110 Fukamidai 3-chome, Yamoto-shi, Kanagawa, 242-0013 (JP). YOSHIDA, Norio [JP/JP]; 17-4 Apt.#301 Chuo-Rinkan 4-chome, Yamato-shi, Kanagawa, 242-0007 (JP).</p> <p>(74) Agent: PAULIUS, Thomas D.; Molex Incorporated, 2222 Wellington Court, Lisle, IL 60532 (US).</p> <p>(81) Designated States (national): CN, KR, US.</p> <p>(84) Designated States (regional): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).</p> <p>Published:
 — with international search report
 — with amended claims</p> <p><i>For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.</i></p> |
|--|---|

(54) Title: INSULATION DISPLACEMENT CONNECTOR

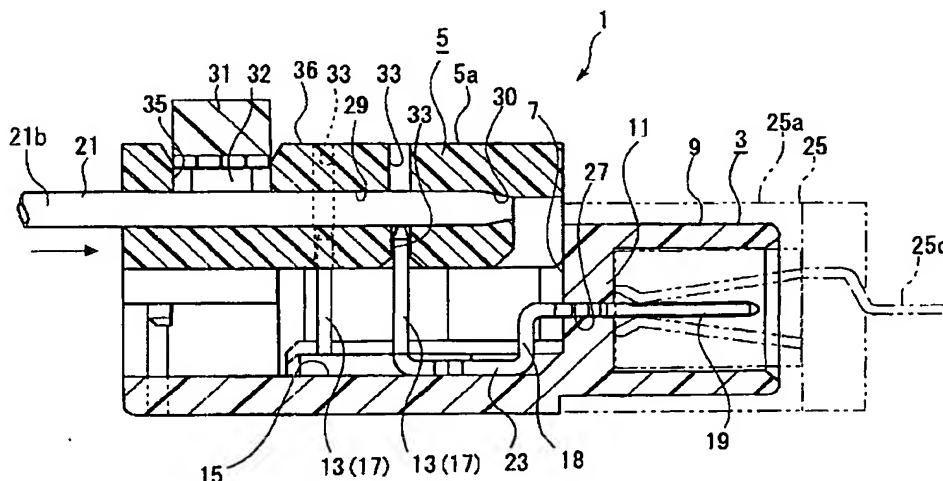

(57) Abstract: An IDT connector (1) is provided which includes: a base housing (3) having a terminal (19) to which a wire (21) is press-fit; a cover housing (5) mounted to the base housing (3) and having a wire insertion hole (29) into which the wire (21) is inserted; a wire holder (31) which is provided to the cover housing, for pressing the wire that is to be press-fitted to the terminal; and an IDT contact slot extending orthogonal to the wire insertion hole and formed adjacent to the wire holder with respect to the longitudinal direction of the wire insertion hole.

WO 03/103093 A1